



★ Timer Control Drain Valve

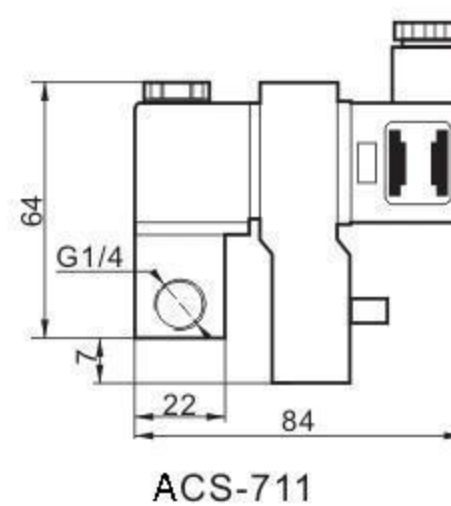



★ Overall Dimension

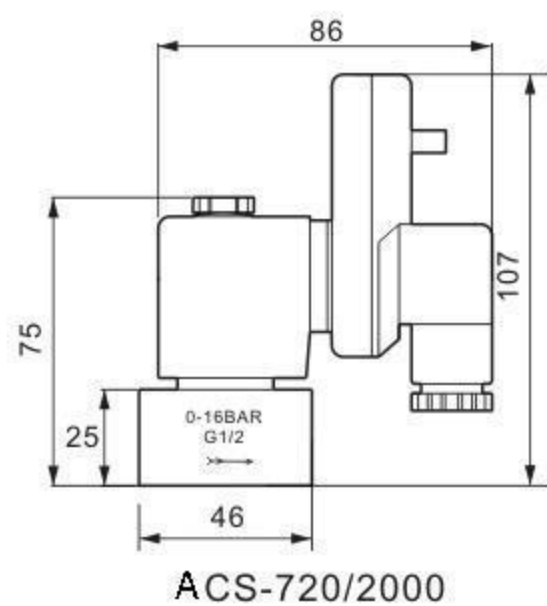

★ Filter Ball Valve



★ Overall Dimension

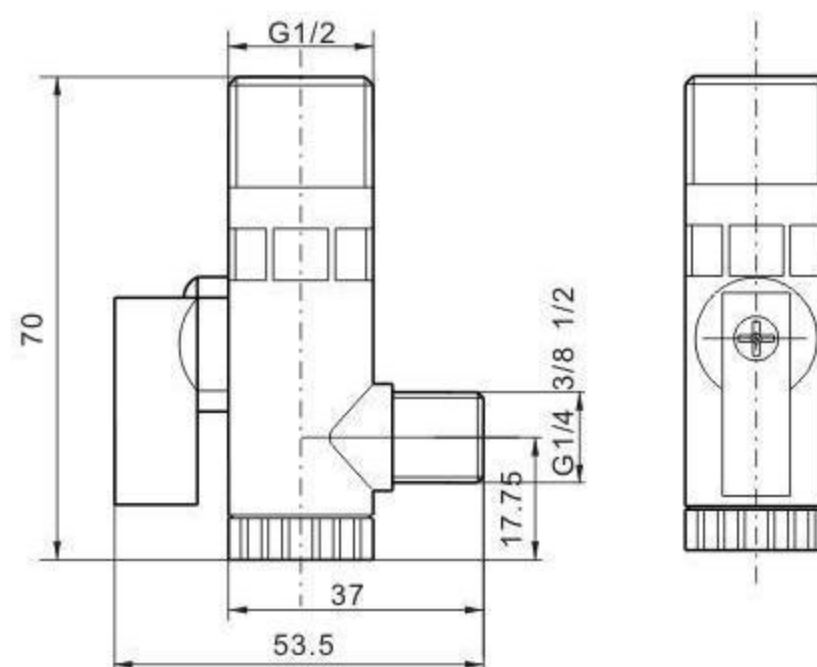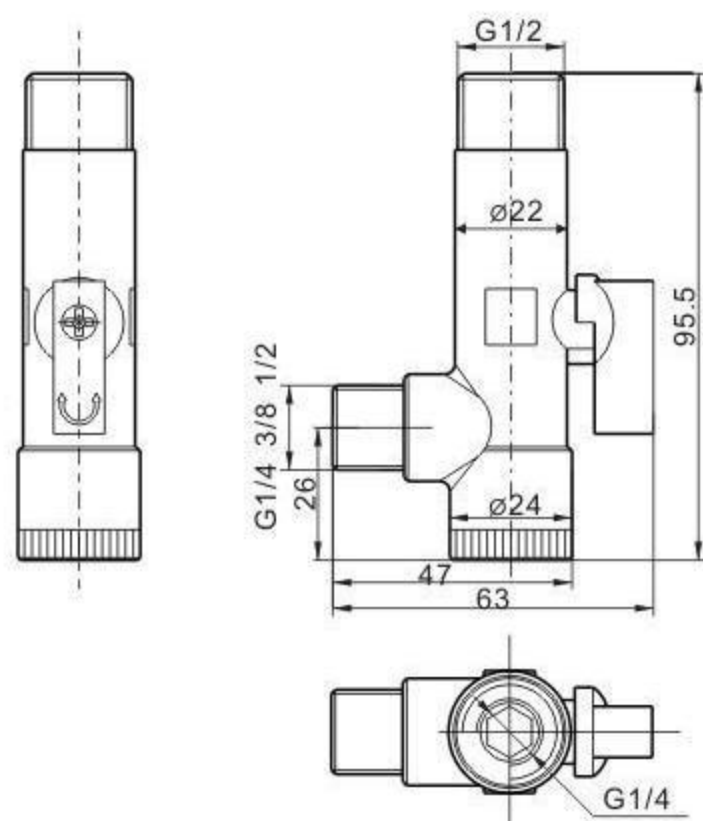

ACS Series Timer Control Drain Valve

★ Speciality

- ★ Conforming to CE standard.
- ★ Full automatic without the need of maintenance.
- ★ Suitable for automatic discharge of condense water in many occasions and automatic irrigation system.
- ★ Different voltage are available for selection.
- ★ Interval time and working time adjustable , with manual testing switch.
- ★ Use electronic switch, high reliability and durable.
- ★ ABS flame-proof house, can reach IP65 class after installed;
- ★ NBR and FPM for wide range application.
- ★ Direct-acting ,big orifice, to avoid blockade.
- ★ Filter ball valve can be installed before drainer to avoid block.

★ Parameters

Model	ACS-720	ACS-2000	ACS-711
Valve Style	Two-position Two-way Direct acting Solenoid Valve		
Connection Port	1/4",3/8",1/2" (Female)		1/8",1/4"(Female)
Working Pressure	16Bar ,25Bar,40Bar,80Ba,		16BAR
On Time	0.5~10sec	0.5~99 sec.	2 Sec.
Off Time	0.5~45min	0.5~99 min.	0.5~120 min.
Ambient Temperature	-20℃~60℃		
Highest Medium Temperature	90℃		
Valve Body	Brass , stainless steel		
Orifice	1.9~4.5mm		2mm
Insulation, Protect Class	F Class , IP65 (With plug)		
Voltage	24-240V DC/AC 50/60Hz±10%		
Mounting	Any Place		

ALPHA CONTROLS LTD

TEL: +44 1942 525833 FAX: +44 1942 523413

EMAIL: technicalsales@alphacontrols.co.uk

WEB: www.alphacontrols.co.uk